


POPCORN SUPERSPOT INTEGRATED



POPCORN SUPERSPOT INTEGRATED

LUMINAIRE

NARROW 8° BEAM  
 SETBACK LIGHT SOURCE FOR VISUAL COMFORT  
 INTEGRATED NON-DIMMABLE DRIVER  
 SUPER INTENSE 2W SINGLE LED LIGHT SOURCE  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS

PERFORMANCE

HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI >80, HIGHER CRI AVAILABLE UPON REQUEST

FINISHES

CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM


SPECIAL BY REQUEST

PHOTOMETRY

LUX @ / BEAM	8°
1M	7553
2M	1888
3M	839
4M	472
5M	302

DELIVERED LUMENS 222LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS



LIGHT CONFIGURATOR ENGINE: SS2TI

POWER  2W

BEAM  8°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR

IP  IP20  IP67

FINISHES  01 AL 0.6KG  02 AL 0.6KG

INCLUDED  INTEGRATED NON-DIMMABLE DRIVER  U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS / VERSATILE MOUNTING
- SPIKE (PG 140)
  - PLATE (PG 141)
  - BASE (PG 141)
  - WONDER BAR 600MM (PG 142)
  - WONDER BAR 1200MM (PG 142)
  - STRAP ON w 1 ADAPTOR (PG 143)
  - ADDITIONAL ADAPTOR QTY \_\_\_\_\_

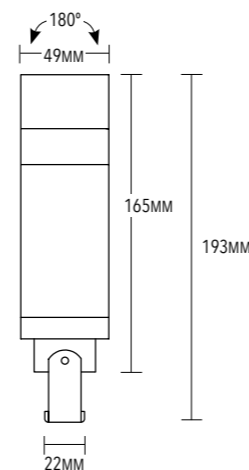

POPCORN 2 TURBO INTEGRATED



POPCORN 2 TURBO INTEGRATED

LUMINAIRE

SETBACK LIGHT SOURCE FOR VISUAL COMFORT  
 INTEGRATED NON-DIMMABLE DRIVER  
 SUPER INTENSE 2W SINGLE LED LIGHT SOURCE  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS

PERFORMANCE

HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

FINISHES


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM

SPECIAL BY REQUEST

PHOTOMETRY

LUX @ BEAM	10°	16°	29°	44°
1M	2786	1639	596	247
2M	696	410	149	62
3M	310	182	66	27
4M	174	102	37	15
5M	111	66	24	10
DELIVERED LUMENS	202LM	190LM	158LM	134LM

TEST CONDITION: 2700K, 700MA, 2W, CLEAR GLASS



LIGHT CONFIGURATOR ENGINE: PC2TI

POWER  2W

BEAM  10°  16°  29°  44°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR

IP  IP20  IP67

FINISHES  01 AL 0.6KG  02 AL 0.6KG

INCLUDED  INTEGRATED NON-DIMMABLE DRIVER  U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS / VERSATILE MOUNTING
- SPIKE (PG 140)
  - PLATE (PG 141)
  - BASE (PG 141)
  - WONDER BAR 600MM (PG 142)
  - WONDER BAR 1200MM (PG 142)
  - STRAP ON w 1 ADAPTOR (PG 143)
  - ADDITIONAL ADAPTOR QTY \_\_\_\_\_

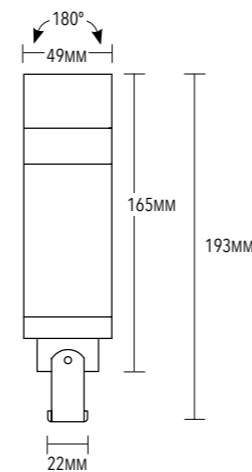

POPCORN 3 TURBO INTEGRATED



POPCORN 3 TURBO INTEGRATED

LUMINAIRE

SETBACK LIGHT SOURCE FOR VISUAL COMFORT  
 INTEGRATED NON-DIMMABLE DRIVER  
 SUPER INTENSE 6W OR 8W LED LIGHT SOURCE  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS

PERFORMANCE

HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI > 80, HIGHER CRI AVAILABLE UPON REQUEST

FINISHES


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM

SPECIAL BY REQUEST

PHOTOMETRY

LUX @ BEAM	10°	16°	29°	44°
1M	7652	4547	1965	714
2M	1913	1137	491	178
3M	850	505	218	79
4M	478	284	123	45
5M	306	182	79	29
DELIVERED LUMENS	549LM	545LM	525LM	430LM

TEST CONDITION: 2700K, 700MA, 6W, CLEAR GLASS



LIGHT CONFIGURATOR ENGINE: PC3TI

POWER  6W (3 x 2W)  8W (4 x 2W)

BEAM  10°  16°  29°  44°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS


GLASS  CL CLEAR

IP  IP20  IP67

FINISHES  01 AL 1.3KG  02 AL 1.3KG

INCLUDED  INTEGRATED NON-DIMMABLE DRIVER  U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS / VERSATILE MOUNTING
- SPIKE (PG 140)
  - PLATE (PG 141)
  - BASE (PG 141)
  - WONDER BAR 600MM (PG 142)
  - STRAP ON w 1 ADAPTOR (PG 143)
  - ADDITIONAL ADAPTOR QTY \_\_\_\_\_

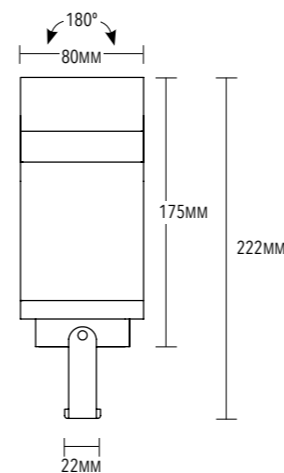

**POPCORN 3S INTEGRATED**



**POPCORN 3S INTEGRATED**

**LUMINAIRE**

SETBACK LIGHT SOURCE FOR VISUAL COMFORT  
 INTEGRATED NON-DIMMABLE DRIVER  
 SUPER INTENSE 8W SINGLE LED LIGHT SOURCE  
 VERSATILE MOUNTING SYSTEM  
 SURFACE TREATED FOR EXTREME CONDITIONS  
 HIGH CORROSION RESISTANT  
 TOUGHENED SAFETY GLASS

**PERFORMANCE**

HOT TESTED & COLOUR BINNED AT Tj 85°C  
 EXCELLENT COLOUR CONSISTENCY USING SINGLE BIN  
 HIGH POWER LM80 COMPLIANT LED  
 CRI >80, HIGHER CRI AVAILABLE UPON REQUEST

**FINISHES**


CLASSIC 01 DOUBLE-ANODISED ALUMINIUM  
 02 BLACK ALUMINIUM

SPECIAL BY REQUEST

**PHOTOMETRY**

LUX @ / BEAM	16°	21°	26°	45°
1M	5258	2259	1990	903
2M	1314	565	497	226
3M	584	251	221	100
4M	329	141	124	56
5M	210	90	80	36
DELIVERED LUMENS	562LM	526LM	526LM	483LM

TEST CONDITION: 2700K, 700MA, 8W, CLEAR GLASS



**LIGHT CONFIGURATOR** ENGINE: PC3SI

POWER  4W  8W

BEAM  16°  21°  26°  45°

CCT  2700K  3000K  4000K  5000K  BLUE  OTHERS

GLASS  CL CLEAR

IP  IP20  IP67

FINISHES  01 AL 1.3KG  02 AL 1.3KG

INCLUDED  INTEGRATED NON-DIMMABLE DRIVER  U-BRACKET, 3000MM CABLE LENGTH

- OPTIONS / VERSATILE MOUNTING
- SPIKE (PG 140)
  - PLATE (PG 141)
  - BASE (PG 141)
  - WONDER BAR 600MM (PG 142)
  - STRAP ON w 1 ADAPTOR (PG 143)
  - ADDITIONAL ADAPTOR QTY \_\_\_\_\_

